


# 760/761



KMF Linking Machine

## KMF linking machines 760/761 linking machines for all point-by-point joints

- Roundneck open or closed
- Vests and panels
- Body and sleeve cuffs
- Roll collar and V-neck
- Skirt seams

### Advantages

- When the garment sections meet regularly, the trimmings are joined to the body fabric point by point
- The needle stitches from the inside outwards for absolutely reliable stitching
- The positive control of wrapper and guide bar movement make a further contribution to reliable functioning of the machine

### Technical features


The machine is available in two types:

#### G-Version

- Eye needle and looper
- Links formed on the outside
- The garment sections meet on the left
- Single or double chain stitch
- Time savings when working ribbed edgings
- Gauge 3-22

#### Z-Version

- Latch needle and wrapper
- Links formed on the inside
- Single chain stitch
- Easier to work with garment sections meeting on the right
- Fancy yarns can be used
- Gauge 3-17

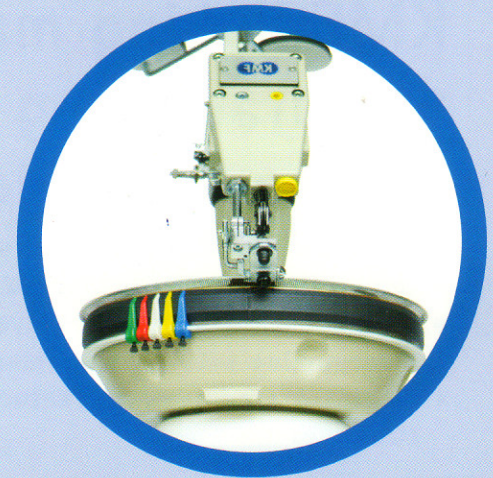

### Specifications

#### Stitch type:

Single or double chain stitch

#### Max speed:

1200 stitches/min

#### Drive:

Fully adjustable

DC drive (760)

2-stage speed

AC drive (761)

#### Machine control:

Elektronic 760

Mechanical 761

#### Dimensions:

crate/carton

height: 1,34m

width: 0,79 m

depth: 0,83 m

weight: 108 kg net

#### Gauge overview:

Point ring gauge 3 - 22

KMF- linking machine needles per	Flat knitting gauge needles per
1 inch	1 inch
3	2,5
4	3
5	4
6/7	5
7/8	6
9	7
10	8
12/14	10
15/16	12
17/18	14
18/20	16
20/22	18

The above mentioned figures are indicative values. Specimens should be sent for precise gauge determination.

Subject to alterations in design, weight and dimensions.

KMF MAKINA SANAYİ VE DIŞ. TİCARET  
Çiftelavuzlar Caddesi Ayvalı Dere Yolu  
No:9 Zeytinburnu / İstanbul/ TURKEY  
Tel: +90 (212) 480 01 80  
Fax: +90 (212) 480 01 83

E-mail: info@kmflinkingmachine.com  
E-mail: volkan@kmflinkingmachine.com  
www.kmflinkingmachine.com

