

# 764/765

## KMF linking machine 764/765 manufacturing system with linking and overlock seam


- When the material is not put on the machine point-by-point, the sections fixed on the head needles are joined
- A height adjustable cutter levels the overstanding fabric and a vacuuming attachment removes the cut-offs
- The integrated overlock feature produces a neat finish to open cut edges

### Advantages


- Shoulder and closing seams joined with precise pattern match
- Easy setting of waistbands, cuffs and sleeves
- Easy assembly of rib and plaited knits
- Rational working of skirts

### Technical features

- Two overlapping single chain stitch seams
- Overlock feature
- Cutting device adjustable in height with extraction system for material overlap
- Regular linking possible with appropriate gauge

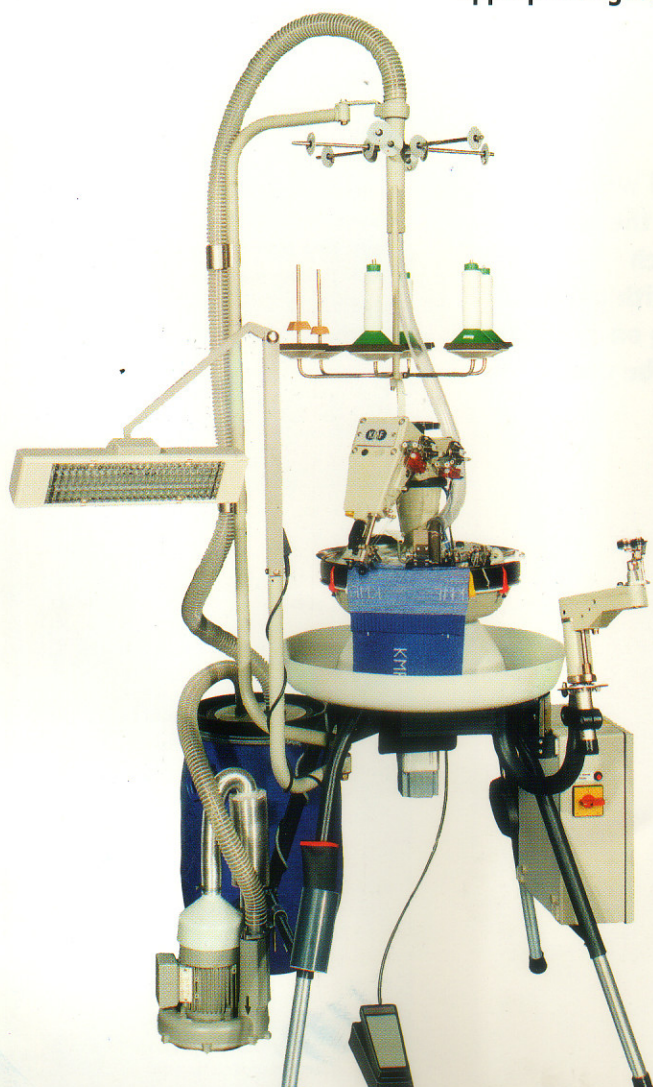

KMF Linking Machine

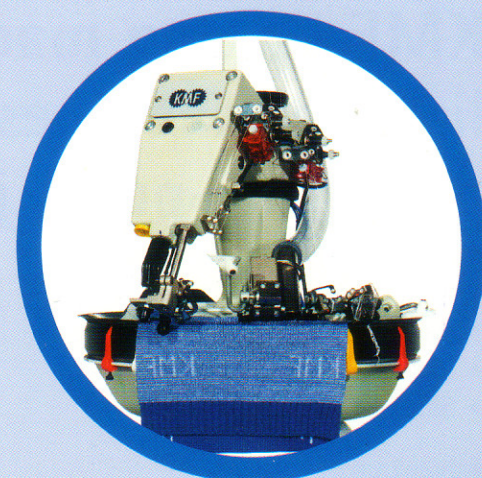

### Specifications

#### Stitch type:

2 x single chain stitches with latch needles and two-thread overlock stitch

#### Max speed:

1200 stitches/min

#### Drive:

Fully adjustable  
DC drive (764)  
2-stage speed  
AC drive (765)

#### Machine control:

Elektronik 764  
Mechanical 765

#### Dimensions:

crate/carton  
height: 1,34m  
width: 0,79 m  
depth: 0,83 m  
weight: 143 kg net

#### Gauge overview:

Point ring gauge 7 - 16

Gauge	Flat knitting
7	3-5
8	5-8
10	8-10
12	9-12
14	12-18
16	21-27 Cotton

The above mentioned figures are indicative values. Specimens should be sent for precise gauge determination.

Subject to alterations in design, weight and dimensions.

KMF MAKINA SANAYİ VE DIŞ. TİCARET  
Çiftehavuzlar Caddesi Ayvalı Dere Yolu  
No:9 Zeytinburnu / İstanbul/ TURKEY  
Tel: +90 (212) 480 01 80  
Fax: +90 (212) 480 01 83

E-mail: info@kmflinkingmachine.com  
E-mail: volkan@kmflinkingmachine.com  
www.kmflinkingmachine.com